

MASTER PL-C 2 Pin

MASTER PL-C 26W/830/2P 1CT

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

Cap-Base Cap-Base Information Life to 10% failures FM	G24d-3 2P 6500 hr
Life to 50% failures	10000 hr
LSF EM 2000h Rated, 3h cycle	99 %
LSF EM 4000h Rated, 3h cycle	98 %
LSF EM 6000h Rated, 3h cycle	92 %
LSF EM 8000h Rated, 3h cycle	78 %

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering	83 Ra8
Index	
Color Designation	Warm White
(text)	
Color Temperature	3000 K
Luminous Flux EM	1800 Lm
25°C, Rated	
Luminous Flux EM	1800 Lm
25°C, Nominal	
Lum Efficacy Rated	68 Lm/W
EM 25°C	
LLMF EM 2000h	92 %
Rated	
LLMF EM 4000h	87 %
Rated	
LLMF EM 6000h	84 %
Rated	

LLMF EM 8000h	81 %
Rated	
Design Temperature	28 C
Chromaticity Coor-	440 -
dinate X	
Chromaticity Coor-	403 -
dinate Y	

• Electrical Characteristics

Lamp Wattage	26 W
Lamp Wattage EM	26 W
25°C, Nominal	
Lamp Wattage EM	26.5 W
25°C, Rated	
Lamp Voltage EM	100 V
25°C	
Lamp Current EM	0.335 A
25°C	
Dimmable	No

• Environmental Characteristics

Energy Efficiency	В
Label (EEL)	
Mercury (Hg)	1.4 mg
Content	_

Product Dimensions

Base Face to Base Face A	130.7 (max) mm
Insertion Length B	149.0 (max) mm
Overall Length C	171.4 (max) mm
Diameter D	27.1 (max) mm
Diameter D1	27.1 (max) mm





MASTER PL-C 2 Pin

• Product Data

Order code 927906183001
Full product code 927906183001
Full product name MASTER PL-C 2

Full product name MASTER PL-C 26W/830/2P 1CT Order product name MASTER PL-C 26W/830/2P 1CT/

5X10CC

Pieces per pack 1
Packing configuration 5X10CC
Packs per outerbox 50

Bar code on pack - 8711500270900

EAN1

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position

Bar code on inter- 8711500270894

mediate packing -

EAN2

Bar code on 8711500270887 outerbox - EAN3 Logistic code(s) - 927906183001


12NC ILCOS code

FSQ-26/30/1B-I-G24d=3

Net weight per piece 0.076 kg


• Dimming is not possible

Dimensional drawing




MASTER PL-C 26W/830/2P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-C 26W/830/2P	130.7	149.0	171.4	27.1	27.1



MASTER PL-C 2 Pin

Photometric data

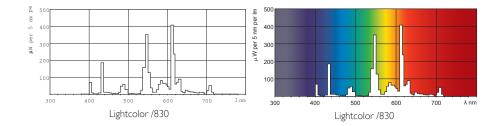



Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.