



IP 42




	• 240 V~ • 240 B~ • 240 Volt
	• 50 / 60 Hz • 50 / 60 Гц
	• 1 x 2,5 mm² – 2x1,5mm² • 1 x 2,5 мм² – 2x1,5мм²
	• -5°C / +45°C
  • PIR • IV • IR • Passive Infra Red (PIR)	



	• Max. • Máx. • Макс. • Maks. • Maksimum
	• Min. • Mín. • Мин. • Min. • Minimum
	• 8 m • 8 м • 8 meter

										
										
• 230 V~ • 230 B~ • 230 Volt	• 1000 W • 1000 Вт	• 4,3 A	• 500 VA • 500 BA	• 2,1 A	• 5 x (2x36 W) • 5 x (2x36 Вт)	• 2,1 A	• 250 VA • 250 BA	• 1,1 A	• 500 VA • 500 BA	• 2,1 A

										
										
• 230 V~ • 230 B~ • 230 Volt	• 5 x (2x36 W) • 5 x (2x36 Br)	• 2,1 A	• 250 W • 250 Br	• 1,1 A	• 250 VA • 250 BA	• 1,1 A	• 250 VA • 250 BA	• 1,1 A	• 250 W • 250 Br	• 1,1 A

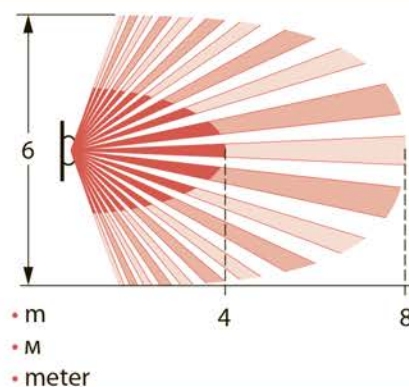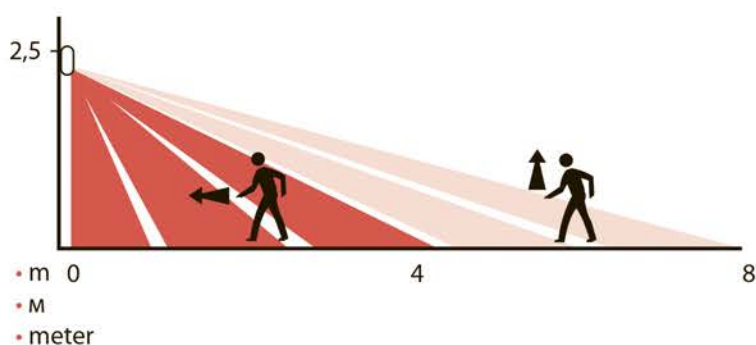


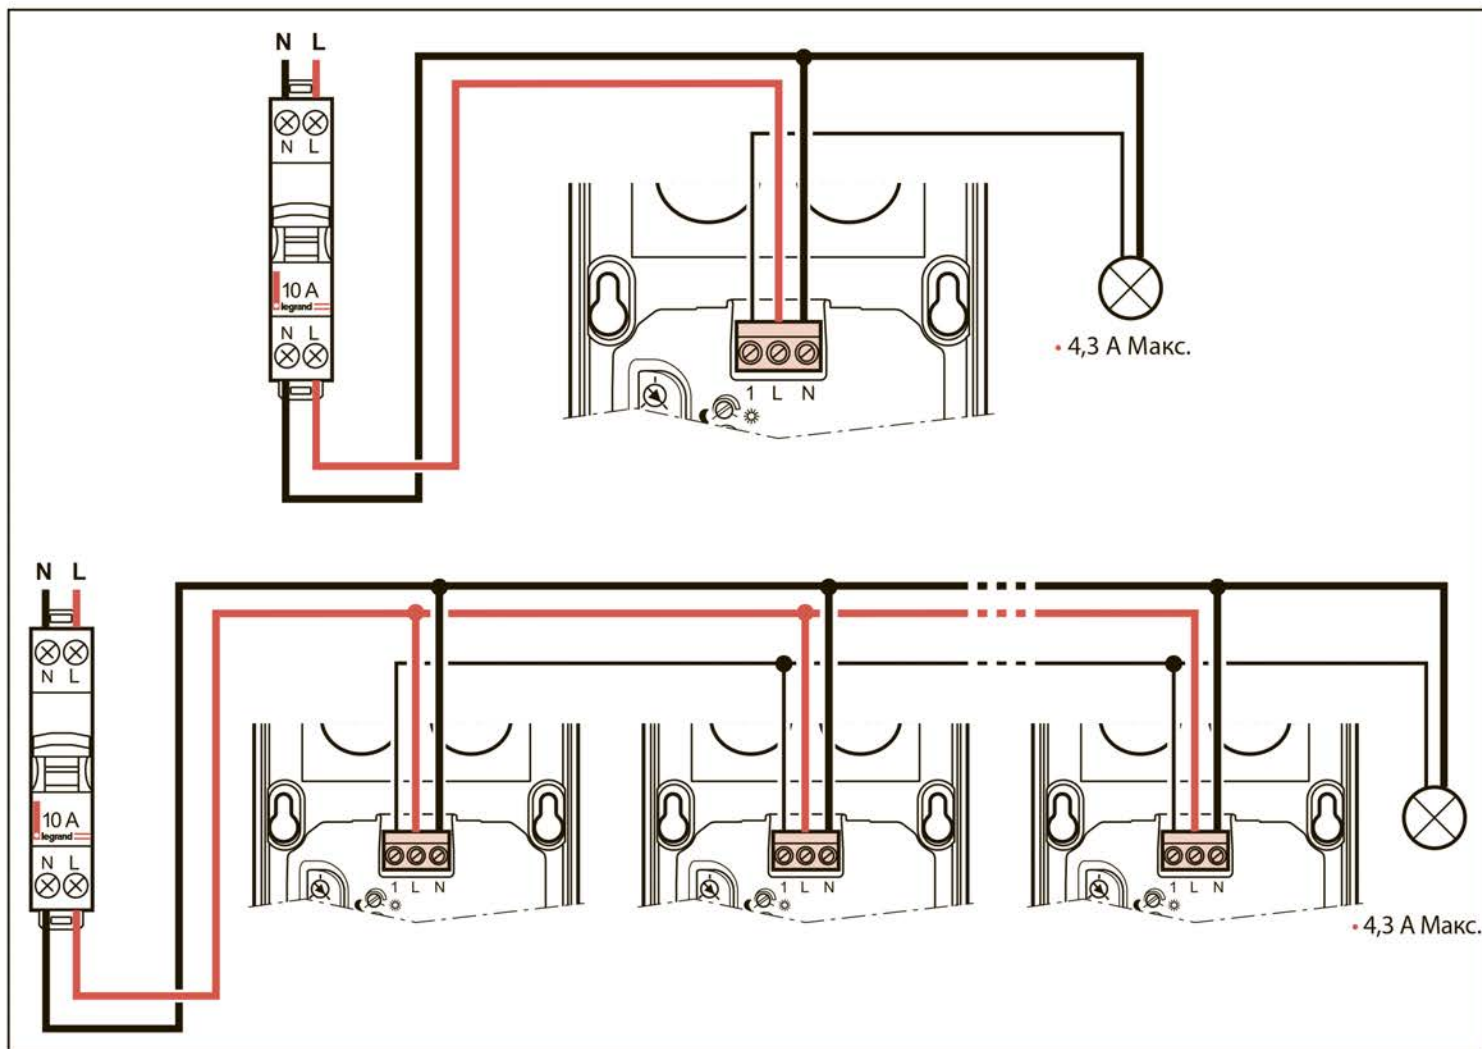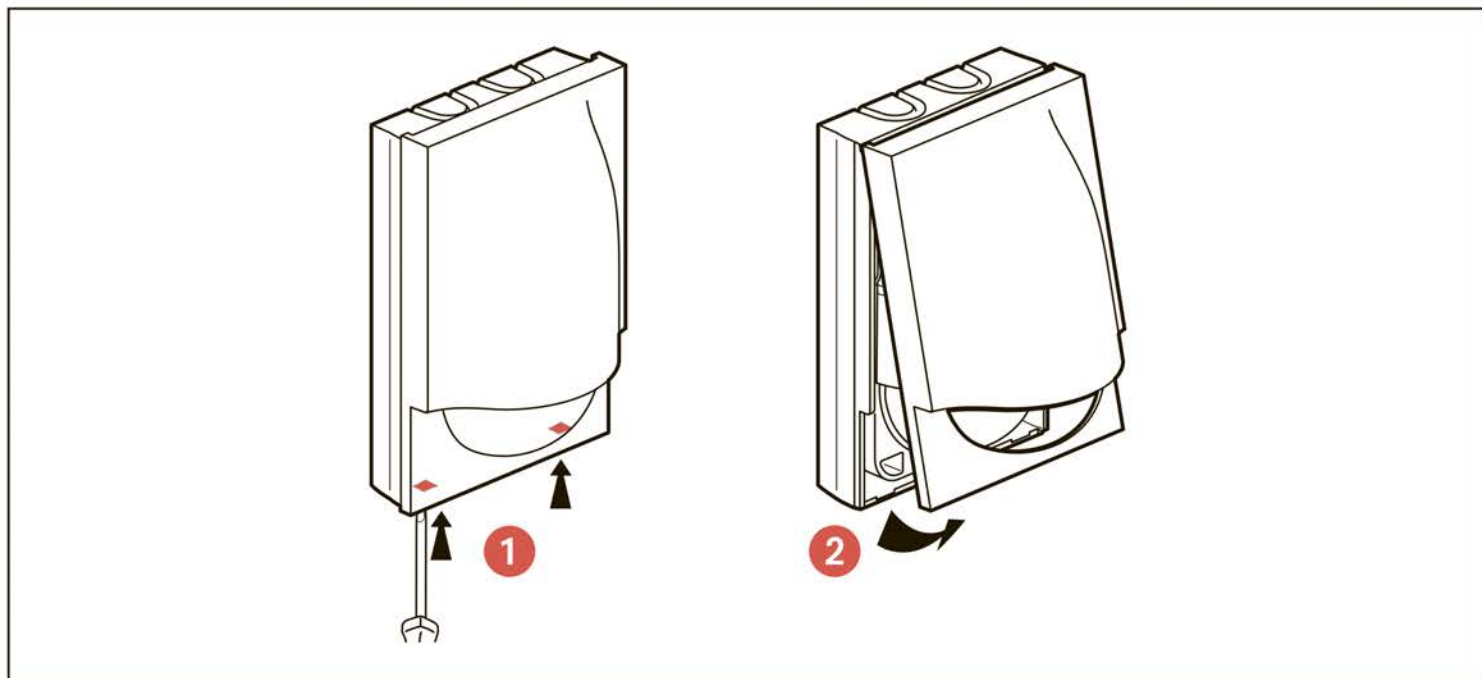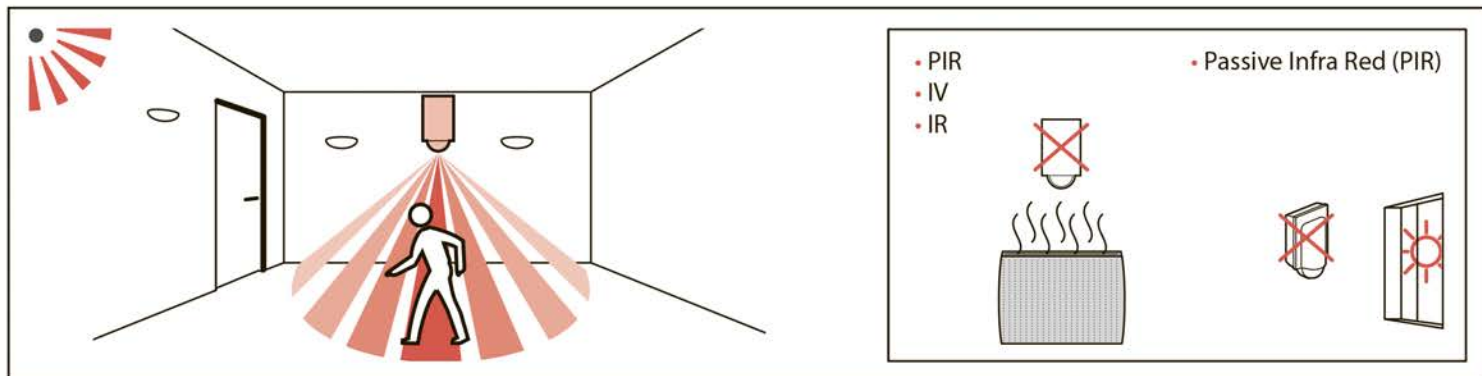

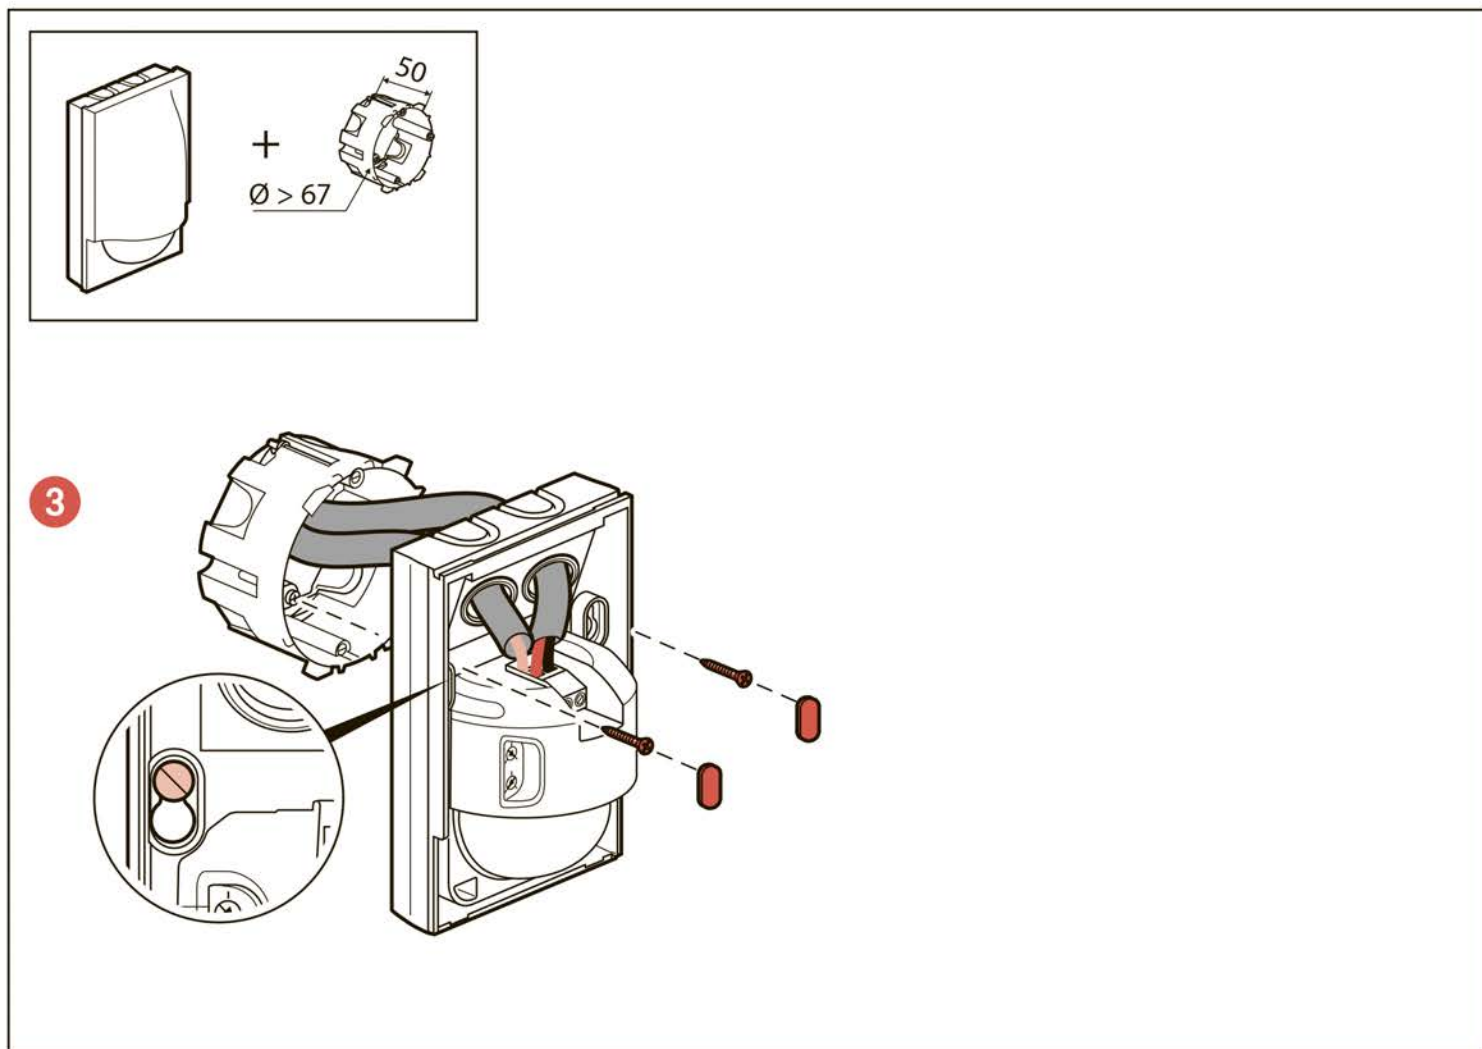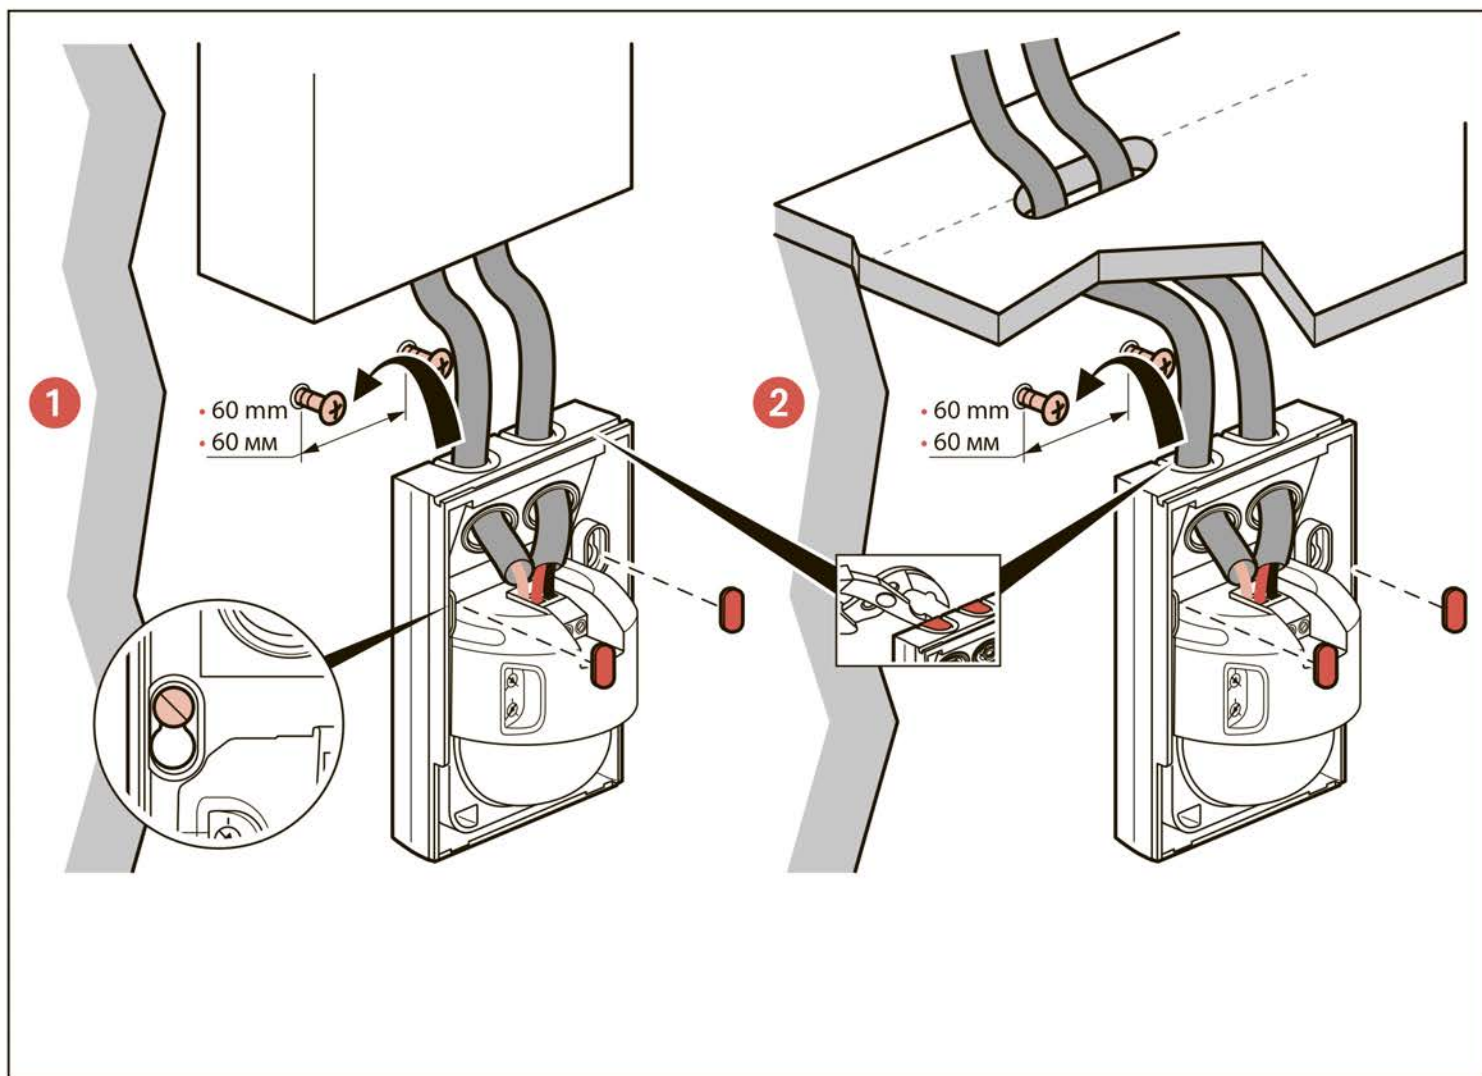



• Режим авто



• Потенциометр регулировки порога освещенности



• 10 - 1275 лк - Макс.



• 10 с - 10 мин



• 8 м

• Режим

• авто

• 10 лк • 1275 лк

• Потенциометр регулировки выдержки времени

Min Max

• Макс.: режим проверки

• Датчик освещенности

• Датчик PIR

