


NG125

10 ↔ 63 A
80 ↔ 125 A




Schneider
Electric




1





Перейти к продукции

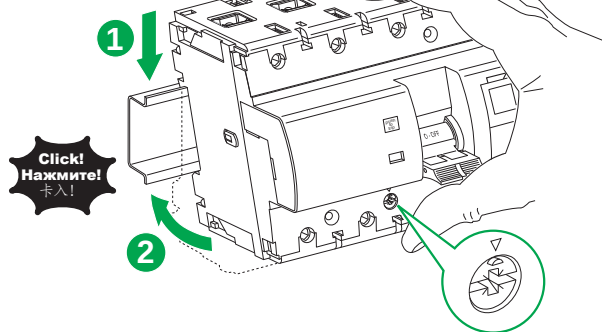


2

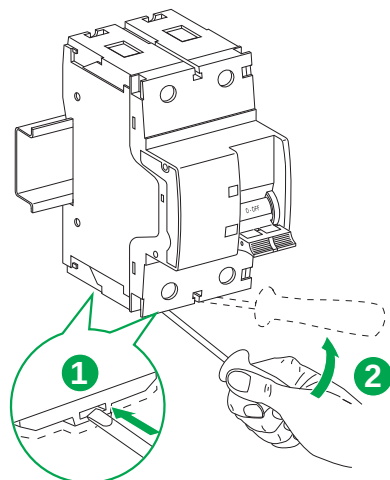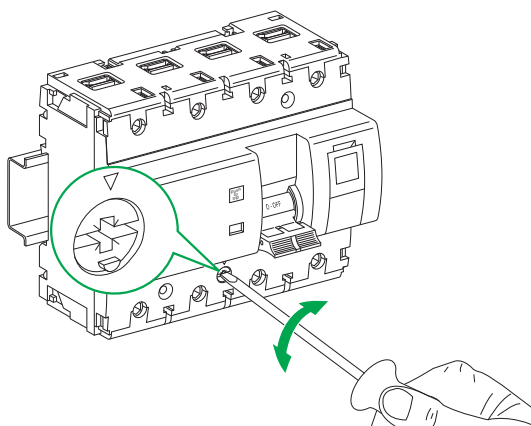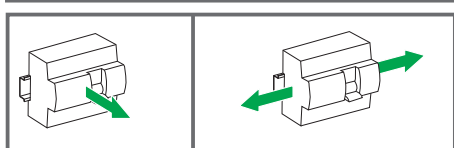


3

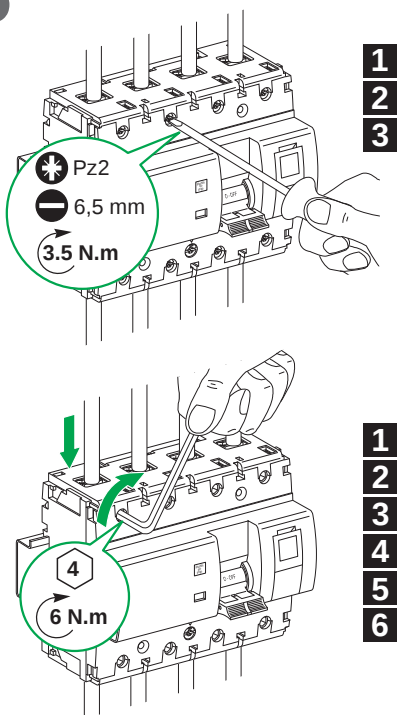


1 1P 19084
2P 19085
3P 19086
4P 19087



2 1P 19080
2P 19081
3P 19082
4P 19083




3 19091




3 x 16 mm²

4 19093

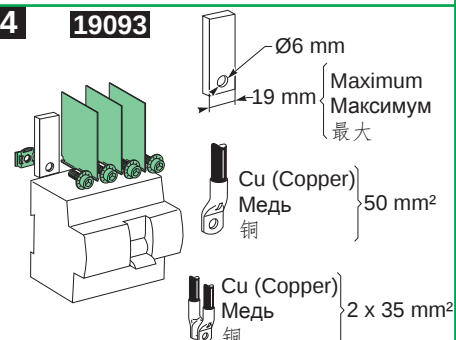


5 19094

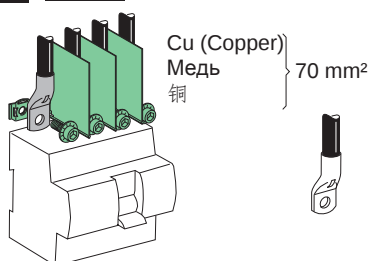

Cu (Copper)
Медь
70 mm²




6 19095

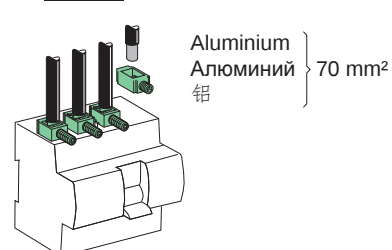





Aluminium
Алюминий
70 mm²

10 ↔ 63 A	20 mm	1.5...50 mm ²	1...35 mm ²
80 ↔ 125 A	20 mm	16...70 mm ²	10...50 mm ²




4

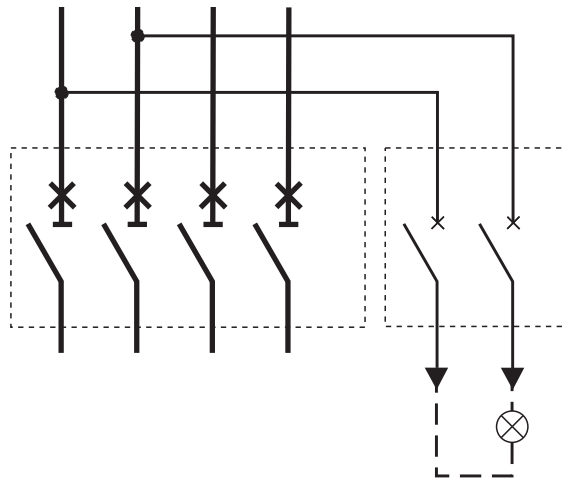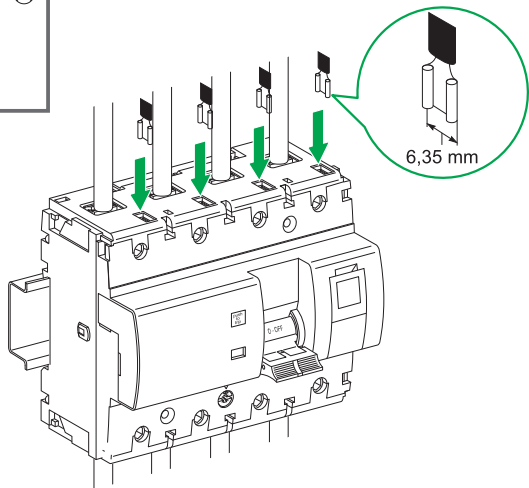

5

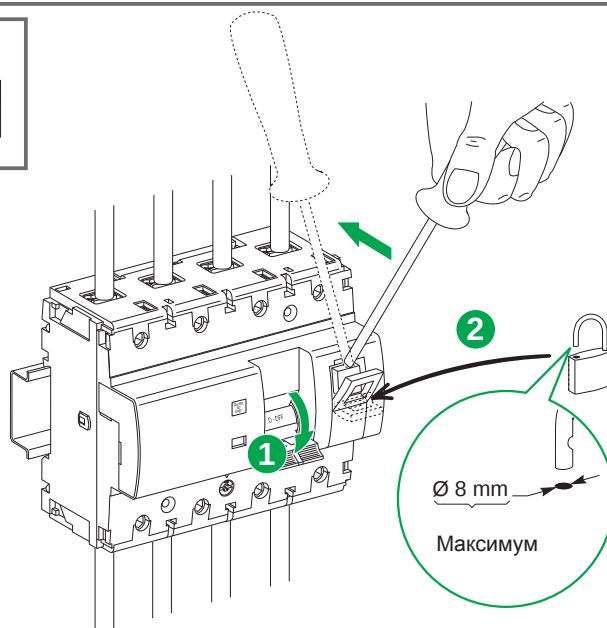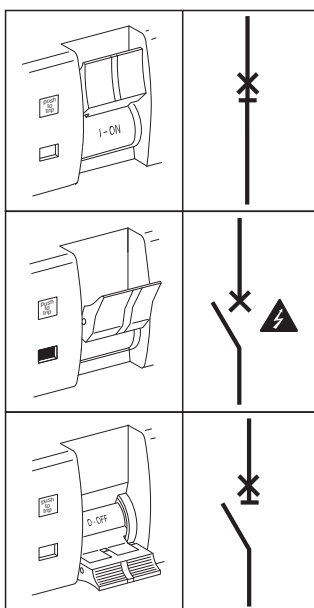

ПРОВЕРКА

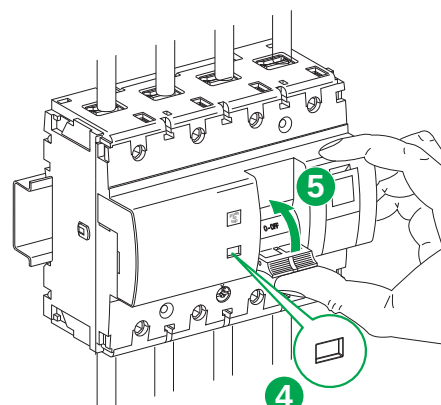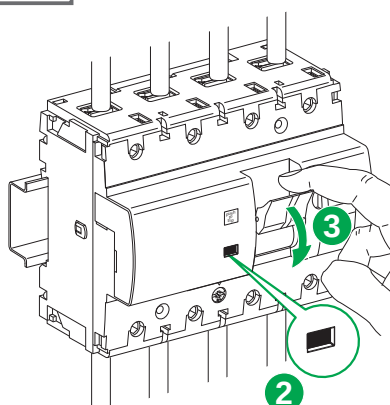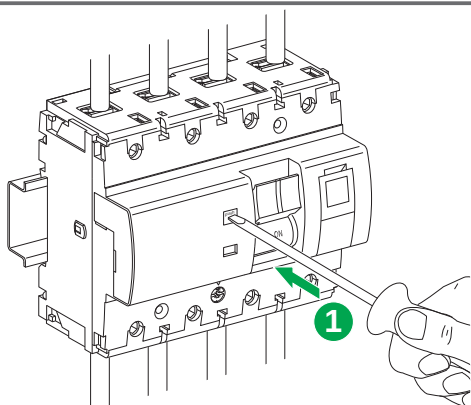

Schneider Electric Industries SAS
35, rue Joseph Monier
CS 30323
F - 92506 Rueil Malmaison Cedex

Данное изделие должно устанавливаться, подключаться и использоваться в соответствии с действующими стандартами и/или нормативными требованиями по установке. Поскольку стандарты, спецификации и элементы конструкции могут периодически изменяться, запросите подтверждение актуальности данных, приведенных в этой публикации.