



MASTER PL-C 4 Pin

[Перейти к продукции](#)

MASTER PL-C 26W/827/4P 1CT

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic HF control gear with integrated pre-heat and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

| | |
|--------------------------------|----------|
| Cap-Base | G24q-3 |
| Cap-Base Information | 4P |
| Life to 10% failures EM | 6500 hr |
| Life to 10% fail Preheat EL,3h | 8000 hr |
| Life to 50% failures EM | 10000 hr |
| Life to 50% fail Preheat EL,3h | 13000 hr |
| LSF HF Preheat 2000h Rated,3h | 99 % |
| LSF HF Preheat 4000h Rated,3h | 98 % |
| LSF HF Preheat 6000h Rated,3h | 97 % |
| LSF HF Preheat 8000h Rated,3h | 90 % |
| LSF HF Preheat 12000h Rated,3h | 60 % |

| | |
|--------------------------------|---------|
| Luminous Flux EL 25°C, Nominal | 1760 Lm |
| Lum Efficacy Rated EM 25°C | 69 Lm/W |
| Lum Efficacy Rated HF 25°C | 75 Lm/W |
| LLMF HF 2000h Rated | 92 % |
| LLMF HF 4000h Rated | 88 % |
| LLMF HF 6000h Rated | 86 % |
| LLMF HF 8000h Rated | 84 % |
| LLMF HF 12000h Rated | 81 % |
| Design Temperature | 28 C |
| Chromaticity Coordinate X | 463 - |
| Chromaticity Coordinate Y | 420 - |

• Light Technical Characteristics

| | |
|--------------------------------|--------------------|
| Color Code | 827 [CCT of 2700K] |
| Color Rendering Index | 83 Ra8 |
| Color Designation (text) | Incandescent White |
| Color Temperature | 2700 K |
| Luminous Flux EM 25°C, Rated | 1760 Lm |
| Luminous Flux EM 25°C, Nominal | 1760 Lm |
| Luminous Flux EL 25°C, Rated | 1760 Lm |

• Electrical Characteristics

| | |
|-------------------------------|---------|
| Lamp Wattage | 26 W |
| Lamp Wattage EM 25°C, Rated | 26.0 W |
| Lamp Wattage EL 25°C, Rated | 24.0 W |
| Lamp Wattage EL 25°C, Nominal | 26 W |
| Lamp Voltage EM 25°C | 100 V |
| Lamp Voltage EL 25°C | 100 V |
| Lamp Current EM 25°C | 0.335 A |

MASTER PL-C 4 Pin

| | |
|-------------------------|---------|
| Lamp Current EL 25°C | 0.335 A |
| Dimmable | Yes |

• Environmental Characteristics

| | |
|----------------------------------|--------|
| Energy Efficiency Label (EEL) | B |
| Mercury (Hg) Content | 1.4 mg |

• Product Dimensions

| | |
|-----------------------------|----------------|
| Base Face to Base Face A | 130.7 (max) mm |
| Insertion Length B | 149.0 (max) mm |
| Overall Length C | 163.9 (max) mm |
| Diameter D | 27.1 (max) mm |
| Diameter D1 | 27.1 (max) mm |

• Product Data



| | |
|---|---------------------------------------|
| Order code | 927907382701 |
| Full product code | 927907382701 |
| Full product name | MASTER PL-C 26W/827/4P 1CT |
| Order product name | MASTER PL-C 26W/827/4P 1CT/ 5X10CC |
| Pieces per pack | 1 |
| Packing configuration | 5X10CC |
| Packs per outerbox | 50 |
| Bar code on pack - EAN1 | 8711500623287 |
| Bar code on inter- mediate packing - EAN2 | 8711500271914 |
| Bar code on outerbox - EAN3 | 8711500716033 |
| Logistic code(s) - 12NC | 927907382701 |
| ILCOS code | FSQ-26/27/1B-E-G24q=3 |
| Net weight per piece | 0.075 kg |

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear

- Shorter lamp life when often switching and not well pre-heated electrodes

Dimensional drawing

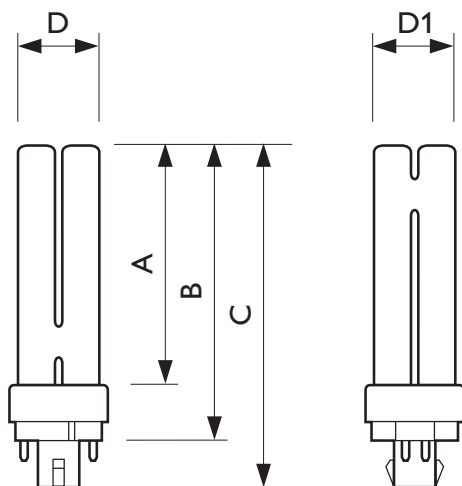


G24q-3

MASTER PL-C 26W/827/4P 1CT

| Product | A (Max) | B (Max) | C (Max) | D (Max) | D1 (Max) |
|-----------------|---------|---------|---------|---------|----------|
| PL-C 26W/827/4P | 130.7 | 149.0 | 163.9 | 27.1 | 27.1 |

Photometric data

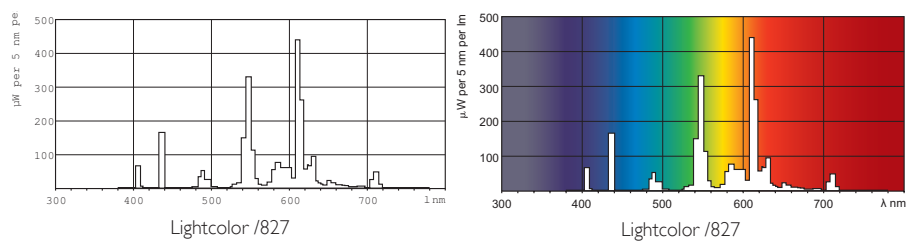

© 2013 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2013, March 2
data subject to change