



# MASTER PL-C 4 Pin <sup>SHOP220</sup>

## MASTER PL-C 26W/830/4P 1CT

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic HF control gear with integrated pre-heat and is provided with a plug-in/pull-out lamp base.

### Product data

#### • General Characteristics

Cap-Base	G24q-3
Cap-Base Information	4P
Life to 10% failures EM	6500 hr
Life to 10% fail Preheat EL,3h	8000 hr
Life to 50% failures EM	10000 hr
Life to 50% fail Preheat EL,3h	13000 hr
LSF HF Preheat 2000h Rated,3h	99 %
LSF HF Preheat 4000h Rated,3h	98 %
LSF HF Preheat 6000h Rated,3h	97 %
LSF HF Preheat 8000h Rated,3h	90 %
LSF HF Preheat 12000h Rated,3h	60 %

Luminous Flux EL 25°C, Nominal	1760 Lm
Lum Efficacy Rated EM 25°C	69 Lm/W
Lum Efficacy Rated HF 25°C	69 Lm/W
LLMF HF 2000h Rated	92 %
LLMF HF 4000h Rated	88 %
LLMF HF 6000h Rated	86 %
LLMF HF 8000h Rated	84 %
LLMF HF 12000h Rated	81 %
Design Temperature	28 C
Chromaticity Coordinate X	440 -
Chromaticity Coordinate Y	403 -

#### • Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	83 Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Luminous Flux EM 25°C, Rated	1760 Lm
Luminous Flux EM 25°C, Nominal	1760 Lm
Luminous Flux EL 25°C, Rated	1760 Lm

#### • Electrical Characteristics

Lamp Wattage	26 W
Lamp Wattage EM 25°C, Rated	26.0 W
Lamp Wattage EL 25°C, Rated	24.0 W
Lamp Wattage EL 25°C, Nominal	26 W
Lamp Voltage EM 25°C	100 V
Lamp Voltage EL 25°C	100 V
Lamp Current EM 25°C	0.335 A



# MASTER PL-C 4 Pin

Lamp Current EL 25°C 0.335 A  
Dimmable Yes

## • Environmental Characteristics

Energy Efficiency Label (EEL) B  
Mercury (Hg) Content 1.4 mg

## • Product Dimensions

Base Face to Base Face A 130.7 (max) mm  
Insertion Length B 149.0 (max) mm  
Overall Length C 163.9 (max) mm  
Diameter D 27.1 (max) mm  
Diameter D1 27.1 (max) mm

## • Product Data



Order code 927907383001  
Full product code 927907383001  
Full product name MASTER PL-C 26W/830/4P 1CT  
Order product name MASTER PL-C 26W/830/4P 1CT/5X10CC  
Pieces per pack 1  
Packing configuration 5X10CC  
Packs per outerbox 50  
Bar code on pack - EAN1 8711500623355  
Bar code on intermediate packing - EAN2 8711500271921  
Bar code on outerbox - EAN3 8711500716040  
Logistic code(s) - 12NC 927907383001  
ILCOS code FSQ-26/30/1B-E-G24q=3  
Net weight per piece 0.075 kg

## Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear

- Shorter lamp life when often switching and not well pre-heated electrodes

## Dimensional drawing

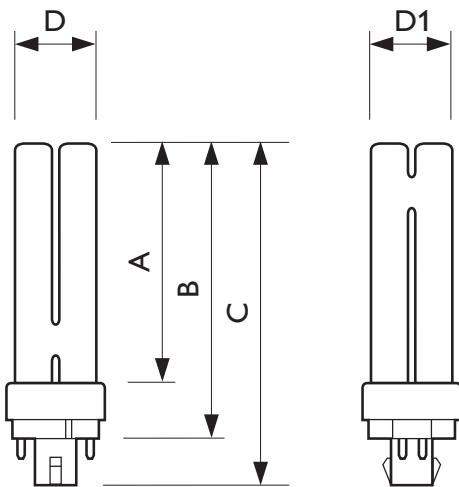


G24q-3

## MASTER PL-C 26W/830/4P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-C 26W/830/4P	130.7	149.0	163.9	27.1	27.1

Photometric data

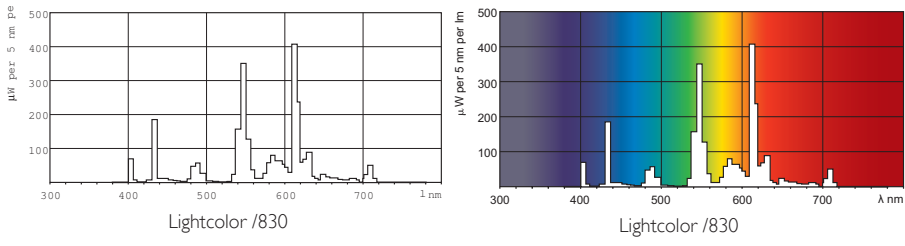

© 2013 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2013, March 2  
data subject to change