



# MASTER TL5 High Output

Перейти к продукции

## MASTER TL5 HO 80W/840 1SL

This TL5 lamp (tube diameter 16 mm) offers high light output. The TL5 HO lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

### Product data

#### • General Characteristics

System Description	High Output
Cap-Base	G5
Cap-Base Information	Green Plate
Bulb	T5 [16 mm]
Life to 10% fail	19000 hr
Preheat EL,3h	
Life to 50% fail	24000 hr
Preheat EL,3h	
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	84 %
20000h Rated,3h	

#### • Light Technical Characteristics

Color Code	840 [CCT of 4000K]
Color Rendering	85 Ra8
Index	
Color Designation	Cool White
(text)	
Color Temperature	4000 K
Luminous Flux EL	6550 Lm
25°C, Rated	
Luminous Flux EL	6550 Lm
25°C, Nominal	

Luminous Flux Lamp	7000 Lm
EL 35°C	
Lum Efficacy Rated	82 Lm/W
HF 25°C	
Lum Efficacy Rated	88 Lm/W
HF 35°C	
LLMF HF 2000h	96 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 12000h	92 %
Rated	
LLMF HF 16000h	91 %
Rated	
LLMF HF 20000h	90 %
Rated	
Design Temperature	35 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	380 -

#### • Electrical Characteristics

Lamp Wattage	80 W
Lamp Wattage EL	79.8 W
25°C, Rated	
Lamp Wattage EL	80 W
25°C, Nominal	
Lamp Wattage EL	80.0 W
35°C	
Lamp Voltage EL	152 V
25°C	



asimpleswitch.com

# PHILIPS

sense and simplicity

# MASTER TL5 High Output

Lamp Voltage EL 35°C	145 V
Lamp Current EL 25°C	0.530 A
Lamp Current EL 35°C	0.555 A
Dimmable	Yes

## • Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	1.4 mg

## • Measuring Conditions

Calibration Current	0.550 A
HF Generator Rated Voltage	290 V
Resistor	260 ohm

## • Product Dimensions


Base Face to Base Face A	1449.0 (max) mm
--------------------------	-----------------

Insertion Length B	1453.7 (min), 1456.1 (max) mm
Overall Length C	1463.2 (max) mm
Diameter D	17 (max) mm

## • Product Data


Order code	927929584057
Full product code	927929584057
Full product name	MASTER TL5 HO 80W/840 1SL
Order product name	MASTER TL5 HO 80W/840 1SL/40
Pieces per pack	1
Packing configuration	40
Packs per outerbox	40
Bar code on pack - EAN1	8711500710451
Bar code on outerbox - EAN3	8711500868862
Logistic code(s) - 12NC	927929584057
ILCOS code	FDH-80/40/1B-L/P-G5-16/1450
Net weight per piece	128.700 gr

## Dimensional drawing

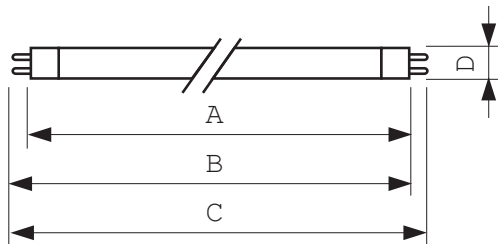



## MASTER TL5 HO 80W/840 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HO 80W/840	1449.0	1453.7	1456.1	1463.2	17



G5

## Photometric data

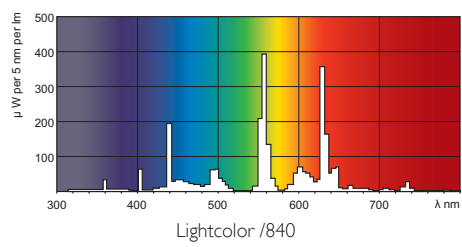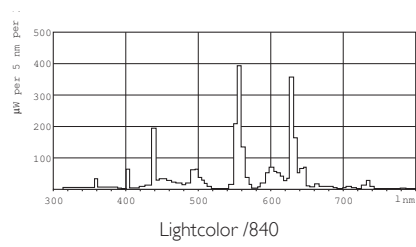

© 2013 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2013, April 5  
data subject to change