


Olymp



Перейти к продукции

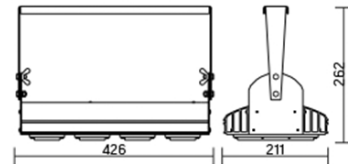

Угол поворота – 180°
 Размер светильника:
 426×211×262mm
 Размер упаковки
 светильника:
 480×310×152mm
 PF ≥ 0,97

○ металл

Артикул	Мощность	Цветовая температура	Световой поток	Угол рассеивания
V1-I0-70077-04L10-6512050	110W	5000K	14850lm	12°
V1-I0-70077-04L02-6512050	110W	5000K	14850lm	30°
V1-I0-70077-04L07-6512050	110W	5000K	14850lm	60°
V1-I0-70077-04L06-6512050	110W	5000K	14850lm	90°
V1-I0-70077-04L08-6512050	110W	5000K	14850lm	30°x110°
V1-I0-70077-04L10-6512040	110W	4000K	14850lm	12°
V1-I0-70077-04L02-6512040	110W	4000K	14850lm	30°
V1-I0-70077-04L07-6512040	110W	4000K	14850lm	60°
V1-I0-70077-04L06-6512040	110W	4000K	14850lm	90°
V1-I0-70077-04L08-6512040	110W	4000K	14850lm	30°x110°
V1-I0-70077-04L10-6512030	110W	3000K	14850lm	12°
V1-I0-70077-04L02-6512030	110W	3000K	14850lm	30°
V1-I0-70077-04L07-6512030	110W	3000K	14850lm	60°
V1-I0-70077-04L06-6512030	110W	3000K	14850lm	90°
V1-I0-70077-04L08-6512030	110W	3000K	14850lm	30°x110°

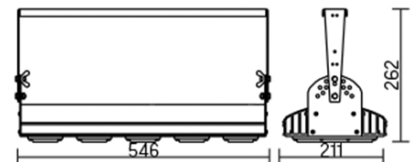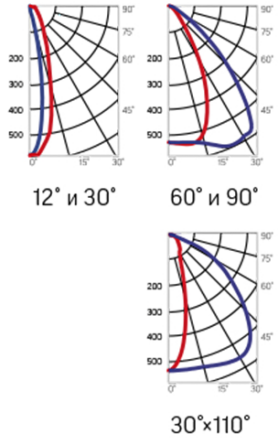

Угол поворота – 180°
 Размер светильника:
 546×211×262mm
 Размер упаковки
 светильника:
 595×315×150mm
 PF ≥ 0,97

○ металл

Артикул	Мощность	Цветовая температура	Световой поток	Угол рассеивания
V1-I0-70078-04L10-6515050	135W	5000K	18225lm	12°
V1-I0-70078-04L02-6515050	135W	5000K	18225lm	30°
V1-I0-70078-04L07-6515050	135W	5000K	18225lm	60°
V1-I0-70078-04L06-6515050	135W	5000K	18225lm	90°
V1-I0-70078-04L08-6515050	135W	5000K	18225lm	30°x110°
V1-I0-70078-04L10-6515040	135W	4000K	18225lm	12°
V1-I0-70078-04L02-6515040	135W	4000K	18225lm	30°
V1-I0-70078-04L07-6515040	135W	4000K	18225lm	60°
V1-I0-70078-04L06-6515040	135W	4000K	18225lm	90°
V1-I0-70078-04L08-6515040	135W	4000K	18225lm	30°x110°
V1-I0-70078-04L10-65150430	135W	3000K	17550lm	12°
V1-I0-70078-04L02-6515030	135W	3000K	17550lm	30°
V1-I0-70078-04L07-6515030	135W	3000K	17550lm	60°
V1-I0-70078-04L06-6515030	135W	3000K	17550lm	90°
V1-I0-70078-04L08-6515030	135W	3000K	17550lm	30°x110°

