

# 1

1.1

-7008

1.2

-7008

50

220

1.3

-7008

1.4

(EAC),

1.5

II

60598–1–2011.

1.6

3.1

15150–69,

2000

# 2

- 175...265

- 50

- 150...295

- 8

2

- 940

- 800

1%

LM-80 (IES) TM-21-11 (IESNA) -

153 000

- (52 ± 5)

(

- (5 ± 2)

- 60...140 (

(cos ) -

0,9

30804.4.4–2013 - I

- IP30


30

40 \*

U194 - v2

- 10

, x x - 182 110 42

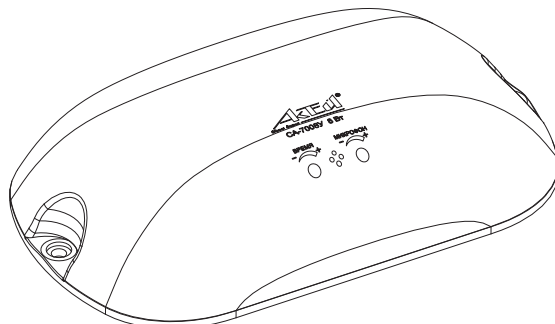

1 —

-7008

# 3

—

-7008 — 1

—

— 1

—

— 1

—

— 1

# 4

—7008

,

,

,

(

)

,

1.

,

,

,

,

,

.

# 5

5.1

5.2

5.3

# 6

6.1

6.2

6.3

6.4


.9

7.1  
7.2  
7.3  
7.4  
7.5  
7.6  
7.7


7.8

	I	II	III
( )	●	●	●
	○	●	○
	○	○	●

2 —  
-7008



3 —  
-7008

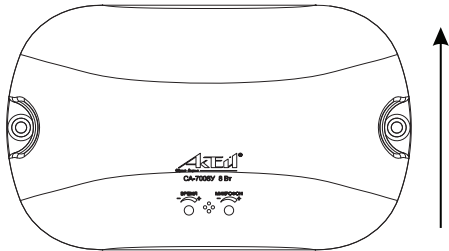

4 —  
-7008

I.  
II.  
III.

72

—6

EAC

60

70 %

40

50 °C.