

Smartbright Direct Panel RC048B

Перейти к продукции

Mounting Instruction/Инструкция по монтажу/Інструкція з монтажу/Орнату нұсқаулығы

V1.0



IEC
60598

IP20

t_a25°C



Type / Тип / Типі	Dimension: LxWxH (mm) /Размеры/Розміри Өлшемдері	LEDs	CCT (K)	Power /Мощность /Потужність /Қуат	Lumen Output (lm) /Световой поток /Світловий потік /Жарық агыны	Voltage /Напряжение /Напруга/Кернеу	Frequency /Частота /Жілік	kg
RC048B LED32S/840 PSU W60L60 NOC CFW	595x595x34	42	4000	36W	3200lm	220-240V~	50/60Hz	1.8
RC048B LED32S/865 PSU W60L60 NOC CFW	595x595x34	42	6500	36W	3200lm	220-240V~	50/60Hz	1.8
RC048B LED32S/840 PSU W60L60 NOC CPG	595x595x34	42	4000	36W	3200lm	220-240V~	50/60Hz	1.8
RC048B LED32S/840 PSU W30L120 NOC CFW	1195x295x34	42	4000	36W	3200lm	220-240V~	50/60Hz	1.8
RC048B LED32S/865 PSU W30L120 NOC CFW	1195x295x34	42	6500	36W	3200lm	220-240V~	50/60Hz	1.8

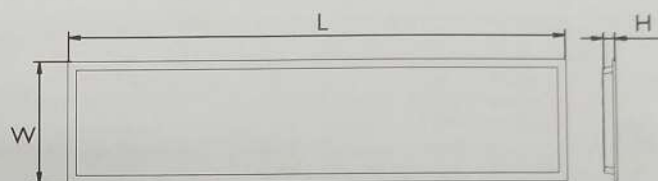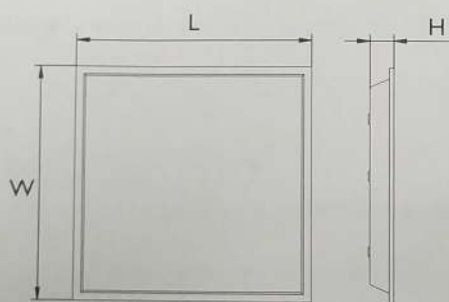

Plaster ceiling set
911401824580
RC048Z SMB-PLC



8 x ST3.2

Suspension set
911401824680
RC048Z SME-2




8xST3.2

6x Ø 6



6xST4

Surface mounted set
911401724272 : RC091Z SMB-597x597
911401724282 : RC091Z SMB-297x1197




8x 6x

Safety cable
911401824780
RC048Z SC




4 x ST3.2


A Visible Profile Ceiling Mounting(VPC)



2

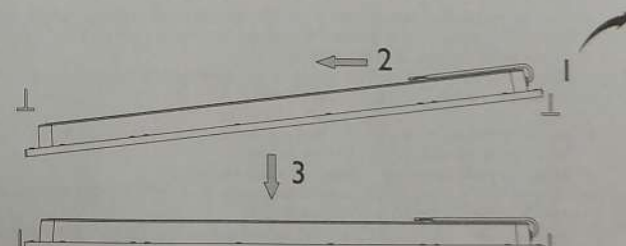


B Plaster Ceiling Version Mounting (PCV)



Cutout size
W60L60 : 580x580 (+/-2)

Ceiling thickness: 8mm-16mm


Unit : mm

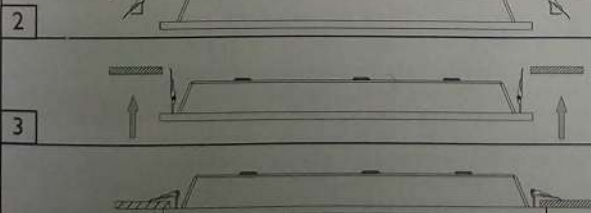

These 4 clips are not included in the package, could be ordered by separate I2NC.
911401824580 : RC048Z SMB-PLC

Wiring Method


Unit : mm



N: Blue L: Brown

Please use IP20 or higher terminal box
(Dimension should be 10x20x25 or higher.)
It is not included in package.

Signify Luminares (Shanghai) Co., Ltd.
Address: 2F, Building 6, No. 1805, Huyi Highway,
Malu Town, Jiading District, Shanghai, P.R. China
Postal code: 201801



PHILIPS

Philips and the Philips shield emblem are registered trademarks of Koninklijke Philips N.V.